


Range: Traditional 50

Colour: Grey Blend

SKU: traditional50_grey_blend

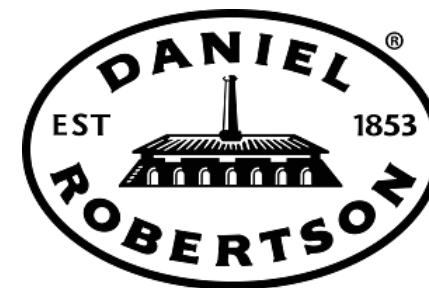

Technical Data

Length (mm)	230
Width (mm)	110
Height (mm)	50
Dimensional Category	DW1
Core Volume (%)	<25
Units per Square Metre	69.5
Pack Size	576
Characteristic Unconfined Compressive Strength (f 'uc) MPa	>12
Maximum Cold Water Absorption (%)	<12
Initial Rate of Absorption (IRA) (kg/m2 min)	0.5-2.5

Coefficient of Expansion e'Factor (mm/m)	<1.0
Durability Class	General Purpose
Liability to Efflorescence	Slight
Lime Pitting Liability	Slight
Solar Absorption	0.63
LRV	18
Place of Manufacture	Tasmania
Product Warranty	100 Years
Solar Absorption	0.63
Average Weight / Unit (kg)	2.3

Please note: FRL applies up to 3m high - restrained on top and bottom.

A BRAND OF

BRICKWORKS